


## 1. Internal Connection (Wire-to-Board)



### GT50

Rated Current:  
1.5A (6-16pos.)  
2.0A (2,4pos.)  
No. of Pos.: 2-16  
AWG: 28



### KM32A

Rated Current: 5A  
No. of Pos.: 2-10  
AWG: 20



### ZE05


Rated Current:  
1.5A (6-16pos.)  
2.0A (2,4pos.)  
No. of Pos.: 2-16  
AWG: 28



### GT25


Rated Current: 3A  
(All pins Power Supply)  
No. of Pos.: 8-40  
AWG: 20-26

## 2. Internal Connection (Floating Board-to-Board, Board-to-Board(FPC))




### BM54

Floating, Compact  
Pitch : 0.4mm  
Stacking Height : 3.0-4.5mm




### DF40T

Low Profile, Narrow Pitch : 0.4mm  
Stacking Height : 1.5-7.0mm  
1.5 (Shielded Type : DF40GT)



### DF12N

Space-saving Design  
Pitch : 0.5mm  
Stacking Height : 3.0-5.0mm

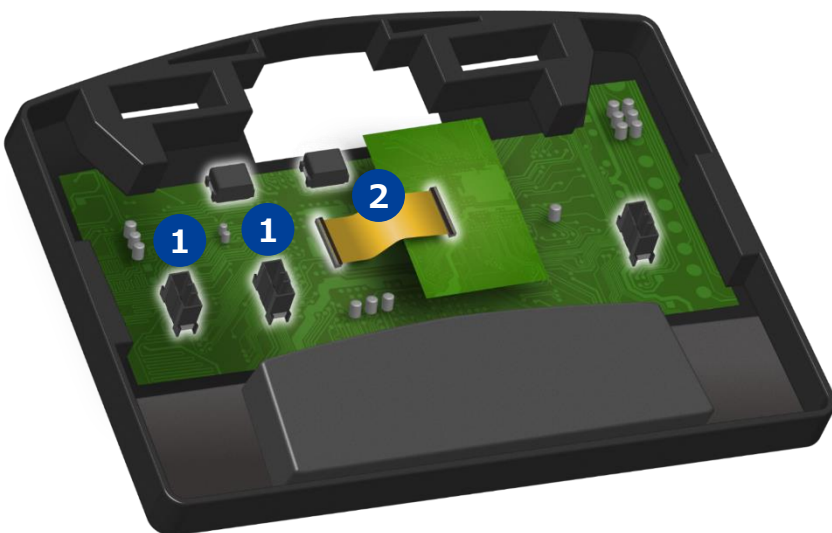

## 2. Internal Connection (FPC/FFC)


125℃


**FH75/FH75M** **FH™**

Two-point Contact  
Pitch: 0.5/0.4mm  
Height: 2.0mm  
FH75M: 100pos.

Best Selling

125℃


**FH52K** **FH™**

Pitch: 0.5/1.0mm  
Height: 2.0mm

Top/Bottom  
Contact


125℃


**FH79**

Pitch: 0.3mm.  
Height: 1.2mm

One Action

105℃


**FH63S/FH67** **FH™**

Pitch: 0.5mm  
Height: 2.8, 5.2mm

Top/Bottom  
Contact

125℃


**FH69** **FH™**

Independent  
Two-Point Contact  
Pitch: 0.5mm  
Height: 2.3mm

## 2. Internal Connection (FPC/FFC, FPC-to-Board)

125℃


**FH65** **FH™**

Low Profile,  
Space-saving Design  
Pitch: 0.5mm  
Height: 1.2mm


Robust

125℃


**FH28K** **FH™**

Pitch: 0.5/1.0mm  
Height: 2.55mm

105℃


**FH40** **FH™**

Vertical Connection  
Pitch : 0.5mm  
Height : 5.8mm

125℃


**ZK1**

Pitch: 2mm  
Rated Current: 1A  
No. of Pos.: 32

125℃


**TB4**

Pitch: 1mm  
Rated Current: 1A  
No. of Pos.: 10,16,30

105℃


**TF70**

Pitch: 0.5mm  
Rated Current: 0.5A  
No. of Pos.: 50